

FONO

Technical information



Other documents available for this product

NARBUTAS product care guide

Screens, desks, and fittings compatibility guide

Quality standard

LST EN ISO 354:2004

LST EN ISO 20189

EN 1023-1:1996

EN 1023-2:2000

EN 1023-3:2000

10 year Warranty

See Warranty statement



Technical information

Types

- Quadrangle acoustic side screen (1)
- Acoustic front screen (2)
- Acoustic front screen for MOTION bench desk (3)

Screen

- 40 mm solid wood frame;
- 40 mm rock wool;
- Covered in felt;
- Upholstered with fabric.

Screen fittings

Clamp fittings (1)

- 4 mm metal sheet;
- Powder-coated metal;
- PA plastic knob (black only);
- Suitable for desktops with a thickness ranging from 14-27 mm;
- Attached to the screen using screws.

Fixed-height fittings (2)

- 2 mm metal sheet;
- Powder-coated metal;
- Attached to the screen and desktop using wood screws.

Fittings for MOTION bench desk (3)

- 4 mm metal sheet;
- Powder-coated metal;
- Attached to the desk frame with screws and inserted into fittings.

1



2




3





Range


Side screens




Front screens

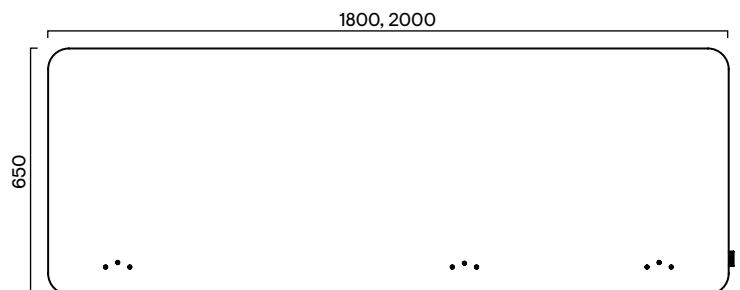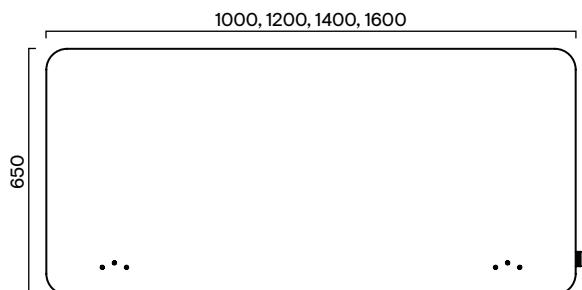


Front screens for MOTION bench desk

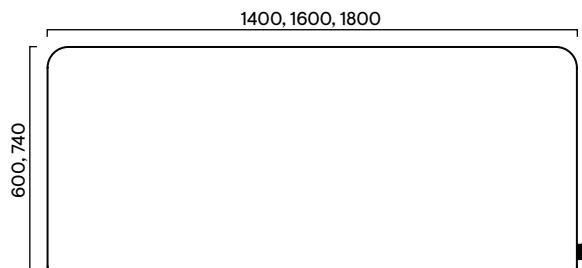


Clamp fittings

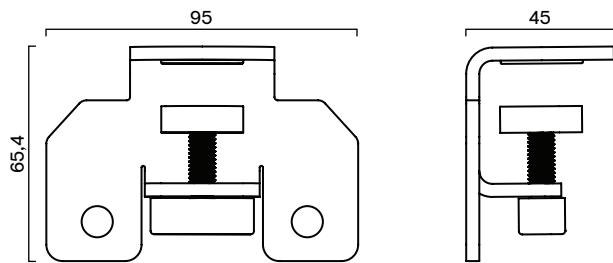

Fixed-height fittings

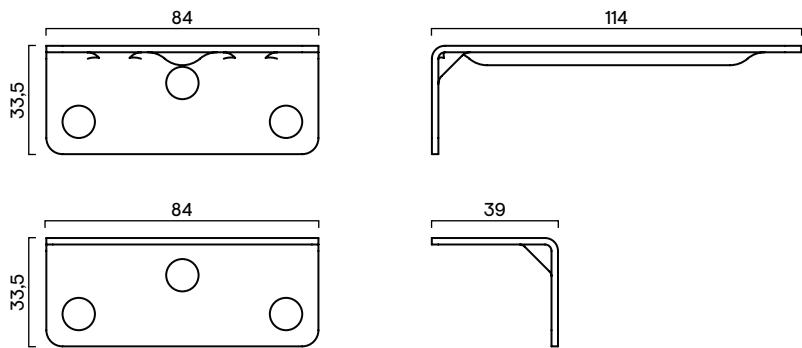

Fittings for MOTION bench desk

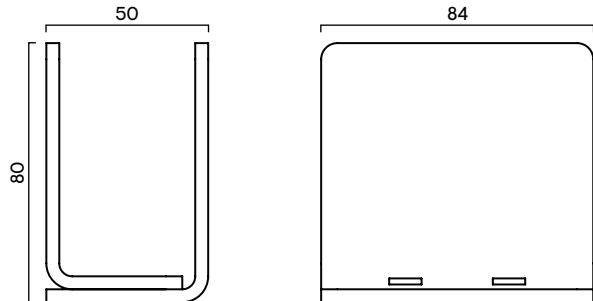

Additional information

- Screen fittings must be ordered separately based on specific requirements.
- When ordering a screen for the MOTION 2-desk bench without ordering a central cable tray (G9A0014, G9A0015 or G9A0016), metal fittings G4F0024 must be ordered.
- Screens can be pinned using pins.
- In case of uncertainty regarding screen compatibility with desk systems, the compatibility guide provides detailed information on compatible screens and the required fittings.